

FYH[®]

CORROSION RESISTANT UNITS

STAINLESS UNITS

THERMOPLASTIC UNITS

NICKEL-PLATED UNITS



CATALOG NO.8500E



The **Corrosion Resistant Series** is available in a wide array of sizes and styles, and units may be customized with a number of different specialized options to accommodate virtually any application. Federal compliance can be assured with **FYH Bearing Units**.



STAINLESS INSERT



- | | |
|--------------------------|---------------------------------------|
| RINGS | Stainless steel (SUS 440C equivalent) |
| BALLS | SUS 440C |
| CAGE | SUS304 |
| GREASE | H1 FOOD GRADE (FDA /USDA) |
| SEALS | NBR |
| SLINGER | SUS304 |
| ANTI-ROTATION PIN | SUS304 |
| SET SCREWS | SUS304 |
| CLEARANCE | C3 |
| AVAILABLE SIZES | UC201X ~ UC212 |



PLATED INSERT



- | | |
|--------------------------|---|
| RINGS | SUJ2 + (zinc plated + trivalent chromate treatment) |
| BALLS | SUJ2 |
| CAGE | NYLON |
| GREASE | H1 FOOD GRADE (FDA /USDA) |
| SEALS | NBR |
| SLINGER | SPCC + (zinc plated + trivalent chromate treatment) |
| ANTI-ROTATION PIN | SUS304 |
| SET SCREWS | SCM435 + (zinc plated + trivalent chromate treatment) |
| CLEARANCE | C3 |
| AVAILABLE SIZES | 204 ~ 212 |



Great performance in demanding salt spray tests (72 hrs) on Stainless units



Solid base housings prevent debris from collecting underneath the unit.



Thermoplastic Housings



BODY	Thermoplastic Polyester
BOLT SLEEVE	SUS304
GREASE NIPPLE NUT	SUS304
AVAILABLE SIZES	204 ~ 208



Stainless Steel Housings



BODY	Lost wax casting (SUS304 or 316 equivalent)
BOLT SLEEVE	
GREASE NIPPLE NUT	
AVAILABLE SIZES	203 ~ 212 (depends on types)

Common Applications

- Food and Beverage Processing
- Chemical & Rubber Processing
- Packaging
- Car Washes



Nickel Plated Housings



BODY	Cast iron + Nickel Plating
BOLT SLEEVE	
GREASE NIPPLE NUT	
AVAILABLE SIZES	204 ~ 212





Stainless steel series pillow type units

UCSP-H1S6

Cylindrical bore (with set screws)

d 12 ~ 60 mm

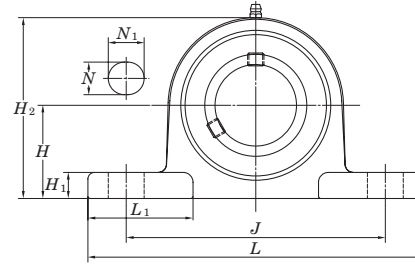

Shaft Dia. mm inch	Dimensions inch mm												Bolt Size inch mm	Unit No.	Housing No.	Bearing No.	Mass kg
	d	H	L	A	J	N	N_1	H_1	H_2	L_1	B	S					
12 15	1/2	1 3/16	5	1 3/16	3 3/4	1/2	23/32	7/16	2 7/32	1 21/32	1.079	0.453	3/8 M10	UCSP201XH1S6 UCSP201-8XH1S6 UCSP202XH1S6 UCSP202-10XH1S6 UCSP203XH1S6	SP203H1	UC201XS6 UC201-8XS6 UC202XS6 UC202-10XS6 UC203XS6	0.47
	5/8	30.2	127	30	95	13	18	11	56	42	27.4	11.5					
17 20	3/4	1 5/16	5	1 3/16	3 3/4	1/2	23/32	7/16	2 15/32	1 21/32	1.220	0.500	3/8 M10	UCSP204-12H1S6 UCSP204H1S6	SP204H1	UC204-12S6 UC204S6	0.6
	7/8	33.3	127	30	95	13	18	11	63	42	31	12.7					
25 1	15/16	1 7/16	5 1/2	1 3/16	4 1/8	1/2	3/4	15/32	2 23/32	1 13/16	1.343	0.563	3/8 M10	UCSP205-14H1S6 UCSP205-15H1S6 UCSP205H1S6 UCSP205-16H1S6	SP205H1	UC205-14S6 UC205-15S6 UC205S6 UC205-16S6	0.7
	1	36.5	140	30	105	13	19	12	69	46	34.1	14.3					
30 1 1/8	1 1/8	1 11/16	6 1/2	1 13/32	4 3/4	21/32	13/16	1/2	3 3/16	2 1/8	1.500	0.626	1/2 M14	UCSP206-18H1S6 UCSP206H1S6 UCSP206-19H1S6 UCSP206-20H1S6	SP206H1	UC206-18S6 UC206S6 UC206-19S6 UC206-20S6	1.1
	1 3/16	42.9	165	36	121	17	21	13	81	54	38.1	15.9					
35 1 1/4	1 1/4	1 7/8	6 9/16	1 1/2	5	21/32	13/16	9/16	3 19/32	2	1.689	0.689	1/2 M14	UCSP207-20H1S6 UCSP207-21H1S6 UCSP207-22H1S6 UCSP207H1S6 UCSP207-23H1S6	SP207H1	UC207-20S6 UC207-21S6 UC207-22S6 UC207S6 UC207-23S6	1.4
	1 5/16	47.6	167	38	127	17	21	14	91	51	42.9	17.5					
40 1 1/2	1 1/2	1 15/16	7 1/4	1 9/16	5 13/32	21/32	13/16	9/16	3 13/16	2 3/8	1.937	0.748	1/2 M14	UCSP208-24H1S6 UCSP208-25H1S6 UCSP208H1S6	SP208H1	UC208-24S6 UC208-25S6 UC208S6	1.7
	1 9/16	49.2	184	40	137	17	21	14	97	60	49.2	19					
45 1 5/8	1 5/8	2 1/8	7 15/32	1 9/16	5 3/4	21/32	13/16	19/32	4 3/32	2 13/32	1.937	0.748	1/2 M14	UCSP209-26H1S6 UCSP209-27H1S6 UCSP209-28H1S6 UCSP209H1S6	SP209H1	UC209-26S6 UC209-27S6 UC209-28S6 UC209S6	2
	1 11/16	54	190	40	146	17	21	15	104	61	49.2	19					
50 1 7/8	1 7/8	2 1/4	8 1/8	1 25/32	6 1/4	25/32	7/8	5/8	4 3/8	2 9/16	2.031	0.748	5/8 M16	UCSP210-30H1S6 UCSP210-31H1S6 UCSP210H1S6 UCSP210-32H1S6	SP210H1	UC210-30S6 UC210-31S6 UC210S6 UC210-32S6	2.5
	1 15/16	57.2	206	45	159	20	22	16	111	65	51.6	19					
55 2	2	2 1/2	8 5/8	1 7/8	6 23/32	25/32	7/8	5/8	4 29/32	2 3/4	2.189	0.874	5/8 M16	UCSP211-32H1S6 UCSP211-34H1S6 UCSP211H1S6 UCSP211-35H1S6	SP211H1	UC211-32S6 UC211-34S6 UC211S6 UC211-35S6	3.4
	2 1/8	63.5	219	48	171	20	22	16	125	70	55.6	22.2					
60 2 3/8	2 1/4	2 3/4	9 1/2	2 5/32	7 1/4	25/32	31/32	7/8	5 7/16	3	2.563	1.000	5/8 M16	UCSP212-36H1S6 UCSP212H1S6 UCSP212-38H1S6 UCSP212-39H1S6	SP212H1	UC212-36S6 UC212S6 UC212-38S6 UC212-39S6	4.5
	2 3/8	69.8	241	55	184	20	25	17	138	76	65.1	25.4					

Part No. of the applicable grease fitting is are shown below.

A-1/4-28UNFN12 201X~210




A-R1/8N12 211~212

Stainless steel series tapped-base pillow type units

UCSPA-H1S6

Cylindrical bore (with set screws)

d 12 ~ 40 mm



Shaft Dia. mm inch	Dimensions inch mm										Unit No.	Housing No.	Bearing No.	Mass kg
	d	H	L	A	J	N	H_1	H_2	L_1	B				
12 1/2	1 3/16	3	1 3/16	2 3/64		13/32	2 1/4	7/8	1.079	0.453	UCSPA201XH1S6 UCSPA201-8XH1S6 UCSPA202XH1S6 UCSPA202-10XH1S6 UCSPA203XH1S6	SPA203H1	UC201XS6 UC201-8XS6 UC202XS6 UC202-10XS6 UC203XS6	0.43
15 5/8	30.2	76	30	52	M10×1.5	10	57	22	27.4	11.5				
17														
20 3/4	1 3/16	3	1 3/16	2 3/64		13/32	2 3/8	7/8	1.220	0.500	UCSPA204-12H1S6 UCSPA204H1S6	SPA204H1	UC204-12S6 UC204S6	0.47
25 7/8	30.2	76	30	52	M10×1.5	10	60	22	31	12.7				
25 15/16	1 7/16	3 5/16	1 3/16	2 13/64		15/32	2 23/32	15/16	1.343	0.563	UCSPA205-14H1S6 UCSPA205-15H1S6 UCSPA205H1S6 UCSPA205-16H1S6	SPA205H1	UC205-14S6 UC205-15S6 UC205S6 UC205-16S6	0.63
30 1 1/8	36.5	84	30	56	M10×1.5	12	69	24	34.1	14.3				
30 1 3/16														
30 1 1/4	1 11/16	3 11/16	1 13/32	2 19/32		15/32	3 3/16	1 3/32	1.500	0.626	UCSPA206-18H1S6 UCSPA206H1S6 UCSPA206-19H1S6 UCSPA206-20H1S6	SPA206H1	UC206-18S6 UC206S6 UC206-19S6 UC206-20S6	0.91
35 1 1/4	42.9	94	36	66	M14×2	12	81	28	38.1	15.9				
35 1 5/16														
35 1 3/8	1 7/8	3 11/32	1 1/2	3 5/32		1/2	3 19/32	1 3/16	1.689	0.689	UCSPA207-20H1S6 UCSPA207-21H1S6 UCSPA207-22H1S6 UCSPA207H1S6 UCSPA207-23H1S6	SPA207H1	UC207-20S6 UC207-21S6 UC207-22S6 UC207S6 UC207-23S6	1.3
40 1 7/16	47.6	110	38	80	M14×2	13	91	30	42.9	17.5				
40 1 1/2														
40 1 9/16	1 15/16	4 9/16	1 9/16	3 5/16		1/2	3 13/16	1 1/4	1.937	0.748	UCSPA208-24H1S6 UCSPA208-25H1S6 UCSPA208H1S6	SPA208H1	UC208-24S6 UC208-25S6 UC208S6	1.6
	49.2	116	40	84	M14×2	13	97	32	49.2	19				



Part No. of the applicable grease fitting is A-1/4-28UNFN12.

Stainless steel series square four-bolt flange type units

UCSF-H1S6

Cylindrical bore (with set screws)

d 20 ~ 60 mm



Shaft Dia. mm inch	Dimensions inch mm										Bolt Size inch mm	Unit No.	Housing No.	Bearing No.	Mass kg
	d	L	A	J	N	A_1	A_2	A_0	B	S					
20 3/4	3 3/8	1 1/32	2 33/64	15/32	13/32	19/32	1 5/16	1.220	0.500	3/8	UCSF204-12H1S6 UCSF204H1S6	SF204H1	UC204-12S6 UC204S6	0.66	
	86	26	64	12	10	15	33.3	31	12.7	M10					
25 7/8 15/16	3 3/4	1 3/32	2 3/4	15/32	13/32	5/8	1 13/32	1.343	0.563	3/8	UCSF205-14H1S6 UCSF205-15H1S6 UCSF205H1S6 UCSF205-16H1S6	SF205H1	UC205-14S6 UC205-15S6 UC205S6 UC205-16S6	0.85	
	95	27.5	70	12	10	16	35.8	34.1	14.3	M10					
30 1 1/8 1 3/16 1 1/4	4 1/4	1 7/32	3 17/64	15/32	13/32	45/64	1 19/32	1.500	0.626	3/8	UCSF206-18H1S6 UCSF206H1S6 UCSF206-19H1S6 UCSF206-20H1S6	SF206H1	UC206-18S6 UC206S6 UC206-19S6 UC206-20S6	1.2	
	108	31	83	12	10	18	40.2	38.1	15.9	M10					
35 1 1/4 1 5/16 1 3/8	4 19/32	1 11/32	3 5/8	35/64	7/16	3/4	1 3/4	1.689	0.689	7/16	UCSF207-20H1S6 UCSF207-21H1S6 UCSF207-22H1S6 UCSF207H1S6 UCSF207-23H1S6	SF207H1	UC207-20S6 UC207-21S6 UC207-22S6 UC207S6 UC207-23S6	1.5	
	117	34	92	14	11	19	44.4	42.9	17.5	M12					
40 1 1/2 1 9/16	5 1/8	1 13/32	4 1/64	5/8	15/32	53/64	2 1/32	1.937	0.748	1/2	UCSF208-24H1S6 UCSF208-25H1S6 UCSF208H1S6	SF208H1	UC208-24S6 UC208-25S6 UC208S6	2	
	130	36	102	16	12	21	51.2	49.2	19	M14					
45 1 5/8 1 11/16 1 3/4	5 13/32	1 1/2	4 9/64	5/8	1/2	55/64	2 1/16	1.937	0.748	1/2	UCSF209-26H1S6 UCSF209-27H1S6 UCSF209-28H1S6 UCSF209H1S6	SF209H1	UC209-26S6 UC209-27S6 UC209-28S6 UC209S6	2.3	
	137	38	105	16	13	22	52.2	49.2	19	M14					
50 1 7/8 1 15/16	5 5/8	1 9/16	4 3/8	5/8	1/2	55/64	2 5/32	2.031	0.748	1/2	UCSF210-30H1S6 UCSF210-31H1S6 UCSF210H1S6 UCSF210-32H1S6	SF210H1	UC210-30S6 UC210-31S6 UC210S6 UC210-32S6	2.6	
	143	40	111	16	13	22	54.6	51.6	19	M14					
55 2 2 1/8 2 3/16	6 3/8	1 11/16	5 1/8	3/4	19/32	63/64	2 5/16	2.189	0.874	5/8	UCSF211-32H1S6 UCSF211-34H1S6 UCSF211H1S6 UCSF211-35H1S6	SF211H1	UC211-32S6 UC211-34S6 UC211S6 UC211-35S6	4	
	162	43	130	19	15	25	58.4	55.6	22.2	M16					
60 2 1/4 2 3/8 2 7/16	6 7/8	1 7/8	5 5/8	3/4	19/32	1 9/64	2 23/32	2.563	1.000	5/8	UCSF212-36H1S6 UCSF212H1S6 UCSF212-38H1S6 UCSF212-39H1S6	SF212H1	UC212-36S6 UC212S6 UC212-38S6 UC212-39S6	4.7	
	175	48	143	19	15	29	68.7	65.1	25.4	M16					

Part No. of the applicable grease fitting is shown below.

A-1/4-28UNFN12 204~210
A-R1/8N12 211~212



Stainless steel series square four-bolt flange type units



UCSF-EH1S6

Cylindrical bore (with set screws)

d 20 ~ 60 mm



Shaft Dia. mm inch	Dimensions										Bolt Size inch	Unit No.	Housing No.	Bearing No.	Mass kg
	d	L	A	J	N	A_1	A_2	A_0	B	S					
20 3/4	3 3/8 86	1 1/32 26	2 33/64 64	7/16 11	13/32 10	19/32 15	1 5/16 33.3	1.220 31	0.500 12.7	3/8	UCSF204-12EH1S6 UCSF204EH1S6	SF204EH1	UC204-12S6 UC204S6	0.66	
25 7/8 15/16 1	Please refer to the UCSF-H1S6.														
30 1 1/8 3 1/16 1 1/4	4 1/4 108	1 7/32 31	3 17/64 83	33/64 13	13/32 10	45/64 18	1 19/32 40.2	1.500 38.1	0.626 15.9	7/16	UCSF206-18EH1S6 UCSF206EH1S6 UCSF206-19EH1S6 UCSF206-20EH1S6	SF206EH1	UC206-18S6 UC206S6 UC206-19S6 UC206-20S6	1.2	
35 1 1/4 1 5/16 1 3/8	4 19/32 117	1 11/32 34	3 5/8 92	33/64 13	7/16 11	3/4 19	1 3/4 44.4	1.689 42.9	0.689 17.5	7/16	UCSF207-20EH1S6 UCSF207-21EH1S6 UCSF207-22EH1S6 UCSF207EH1S6 UCSF207-23EH1S6	SF207EH1	UC207-20S6 UC207-21S6 UC207-22S6 UC207S6 UC207-23S6	1.5	
40 1 1/2 1 9/16	5 1/8 130	1 13/32 36	4 1/64 102	35/64 14	15/32 12	53/64 21	2 1/32 51.2	1.937 49.2	0.748 19	1/2	UCSF208-24EH1S6 UCSF208-25EH1S6 UCSF208EH1S6	SF208EH1	UC208-24S6 UC208-25S6 UC208S6	2	
45 1 5/8 1 11/16 1 3/4	Please refer to the UCSF-H1S6.														
50 1 7/8 1 15/16 2	Please refer to the UCSF-H1S6.														
55 2 2 1/8 2 3/16	6 3/8 162	1 11/16 43	5 1/8 130	43/64 17	19/32 15	63/64 25	2 5/16 58.4	2.189 55.6	0.874 22.2	5/8	UCSF211-32EH1S6 UCSF211-34EH1S6 UCSF211EH1S6 UCSF211-35EH1S6	SF211EH1	UC211-32S6 UC211-34S6 UC211S6 UC211-35S6	4	
60 2 1/4 2 3/8 2 7/16	6 7/8 175	1 7/8 48	5 5/8 143	43/64 17	19/32 15	1 9/64 29	2 23/32 68.7	2.563 65.1	1.000 25.4	5/8	UCSF212-36EH1S6 UCSF212EH1S6 UCSF212-38EH1S6 UCSF212-39EH1S6	SF212EH1	UC212-36S6 UC212S6 UC212-38S6 UC212-39S6	4.7	

Part No. of the applicable grease fitting is shown below.



- A-1/4-28UNFN12 204~208
- A-R1/8N12 211~212

Stainless steel series oval two-bolt flange type units

UCSFL-H1S6

Cylindrical bore (with set screws)

d 12 ~ 50 mm



Shaft Dia.		Dimensions										Bolt Size	Unit No.	Housing No.	Bearing No.	Mass
mm	inch	inch mm														
d		H	L	A	J	N	A_1	A_2	A_0	B	S	mm				
12	1/2	1 27/32	2 1/16	1 15/16	3	15/32	13/32	9/16	2 3/16	1.079	0.453	3/8	UCSFL201XSH1S6 UCSFL201-8XSH1S6 UCSFL202XSH1S6 UCSFL202-10XSH1S6 UCSFL203XSH1S6	SFL203H1	UC201XS6 UC201-8XS6 UC202XS6 UC202-10XS6 UC203XS6	0.33
15	5/8	98	52	24	76.5	12	10	14	29.9	27.4	11.5	M10				
17																
20	3/4	4 7/16	2 3/8	1 1/32	3 35/64	15/32	13/32	19/32	1 5/16	1.220	0.500	3/8	UCSFL204-12H1S6 UCSFL204H1S6	SFL204H1	UC204-12S6 UC204S6	0.47
25	7/8	5 1/8	2 11/16	1 3/32	3 57/64	5/8	13/32	5/8	1 13/32	1.343	0.563	1/2				
25	15/16	130	68	27.5	99	16	10	16	35.8	34.1	14.3	M14				
30	1															
30	1 1/8	5 13/16	3 5/32	1 7/32	4 19/32	5/8	13/32	45/64	1 19/32	1.500	0.626	1/2	UCSFL206-18H1S6 UCSFL206H1S6 UCSFL206-19H1S6 UCSFL206-20H1S6	SFL206H1	UC206-18S6 UC206S6 UC206-19S6 UC206-20S6	0.9
30	1 3/16	148	80	31	117	16	10	18	40.2	38.1	15.9	M14				
35	1 1/4															
35	1 5/16	6 11/32	3 11/32	1 11/32	5 1/8	5/8	7/16	3/4	1 3/4	1.689	0.689	1/2				
35	1 3/8	161	85	34	130	16	11	19	44.4	42.9	17.5	M14				
40	1 7/16															
40	1 1/2	6 7/8	3 11/16	1 13/32	5 49/64	5/8	15/32	53/64	2 1/32	1.937	0.748	1/2	UCSFL208-24H1S6 UCSFL208-25H1S6 UCSFL208H1S6	SFL208H1	UC208-24S6 UC208-25S6 UC208S6	1.4
40	1 9/16	175	94	36	144	16	12	21	51.2	49.2	19	M14				
45	1 5/8															
45	1 11/16	7 13/32	3 15/16	1 1/2	5 53/64	3/4	1/2	55/64	2 1/16	1.937	0.748	5/8	UCSFL209-26H1S6 UCSFL209-27H1S6 UCSFL209-28H1S6 UCSFL209H1S6	SFL209H1	UC209-26S6 UC209-27S6 UC209-28S6 UC209S6	1.6
45	1 3/4	188	100	38	148	19	13	22	52.2	49.2	19	M16				
50	1 7/8															
50	1 15/16	7 3/4	4 3/16	1 9/16	6 3/16	3/4	1/2	55/64	2 5/32	2.031	0.748	5/8				
50	2	197	106	40	157	19	13	22	54.6	51.6	19	M16				

Part No. of the applicable grease fitting is A-1/4-28UNFN12.



Stainless steel series oval two-bolt flange type units



UCSFL-EH1S6

Cylindrical bore (with set screws)

d 12 ~ 50 mm



Shaft Dia. mm inch	Dimensions										Bolt Size inch mm	Unit No.	Housing No.	Bearing No.	Mass kg
	H	L	A	J	N	A_1	A_2	A_0	B	S					
12 1/2	1 27/32	2 1/16	1 15/16	3	25/64	13/32	9/16	2 3/16	1.079	0.453	5/16	UCSFL201XESH1S6 UCSFL201-8XESH1S6 UCSFL202XESH1S6 UCSFL202-10XESH1S6 UCSFL203XESH1S6	SFL203EH1	UC201XS6 UC201-8XS6 UC202XS6 UC202-10XS6 UC203XS6	0.33
15 5/8	98	52	24	76.2	10	10	14	29.9	27.4	11.5					
17															
20 3/4	4 7/16	2 3/8	1 1/32	3 17/32	25/64	13/32	19/32	1 5/16	1.220	0.500	5/16	UCSFL204-12EH1S6 UCSFL204EH1S6	SFL204EH1	UC204-12S6 UC204S6	0.47
25 7/8 15/16	5 1/8	2 11/16	1 3/32	3 57/64	15/32	13/32	5/8	1 13/32	1.343	0.563					
25 1	130	68	27.5	98.8	12	10	16	35.8	34.1	14.3	3/8	UCSFL205-14EH1S6 UCSFL205-15EH1S6 UCSFL205EH1S6 UCSFL205-16EH1S6	SFL205EH1	UC205-14S6 UC205-15S6 UC205S6 UC205-16S6	0.61
30 1 1/8 1 3/16 1 1/4	5 13/16	3 5/32	1 7/32	4 19/32	15/32	13/32	45/64	1 19/32	1.500	0.626					
30	148	80	31	116.7	12	10	18	40.2	38.1	15.9	3/8	UCSFL206-18EH1S6 UCSFL206EH1S6 UCSFL206-19EH1S6 UCSFL206-20EH1S6	SFL206EH1	UC206-18S6 UC206S6 UC206-19S6 UC206-20S6	0.9
35 1 1/4 1 5/16 1 3/8	6 11/32	3 11/32	1 11/32	5 1/8	33/64	7/16	3/4	1 3/4	1.689	0.689					
35	161	85	34	130.2	13	11	19	44.4	42.9	17.5	7/16	UCSFL207-20EH1S6 UCSFL207-21EH1S6 UCSFL207-22EH1S6 UCSFL207EH1S6 UCSFL207-23EH1S6	SFL207EH1	UC207-20S6 UC207-21S6 UC207-22S6 UC207S6 UC207-23S6	1.1
40 1 7/16 1 1/2 1 9/16	6 7/8	3 11/16	1 13/32	5 21/32	33/64	15/32	53/64	2 1/32	1.937	0.748					
40	175	94	36	143.7	13	12	21	51.2	49.2	19	7/16	UCSFL208-24EH1S6 UCSFL208-25EH1S6 UCSFL208EH1S6	SFL208EH1	UC208-24S6 UC208-25S6 UC208S6	1.4
45 1 5/8 1 11/16 1 3/4	7 13/32	3 15/16	1 1/2	5 27/32	19/32	1/2	55/64	2 1/16	1.937	0.748					
45	188	100	38	148.4	15	13	22	52.2	49.2	19	1/2	UCSFL209-26EH1S6 UCSFL209-27EH1S6 UCSFL209-28EH1S6 UCSFL209EH1S6	SFL209EH1	UC209-26S6 UC209-27S6 UC209-28S6 UC209S6	1.6
50 1 7/8 1 15/16 2	7 3/4	4 3/16	1 9/16	6 3/16	19/32	1/2	55/64	2 5/32	2.031	0.748					
50	197	106	40	157	15	13	22	54.6	51.6	19	1/2	UCSFL210-30EH1S6 UCSFL210-31EH1S6 UCSFL210EH1S6 UCSFL210-32EH1S6	SFL210EH1	UC210-30S6 UC210-31S6 UC210S6 UC210-32S6	1.9



Part No. of the applicable grease fitting is A-1/4-28UNFN12.

Stainless steel series take-up type units

UCST-H1S6

Cylindrical bore (with set screws)

d 20 ~ 50 mm



Shaft Dia. mm inch	Dimensions inch mm																Unit No.	Housing No.	Bearing No.	Mass kg
	d	A	A ₁	A ₂	H	H ₁	H ₂	L	L ₁	L ₂	L ₃	N	N ₁	N ₂	B	S				
20 3/4	1 1/4	15/32	29/32	3 1/2	3	1 13/16	3 1/2	2 5/16	11/32	1 23/32	3/4	23/32	1 1/4	1.220	0.500	UCST204-12H1S6 UCST204H1S6	ST204H1	UC204-12S6 UC204S6	0.73	
	32	12	23	89	76.2	46	89	59	9	44	19	18	32	31	12.7					
25 7/8 15/16 1	1 1/4	15/32	31/32	3 1/2	3	1 13/16	3 21/32	2 3/8	11/32	1 23/32	3/4	23/32	1 1/4	1.343	0.563	UCST205-14H1S6 UCST205-15H1S6 UCST205H1S6 UCST205-16H1S6	ST205H1	UC205-14S6 UC205-15S6 UC205S6 UC205-16S6	0.79	
	32	12	25	89	76.2	46	93	60	9	44	19	18	32	34.1	14.3					
	1 1/8	1 15/32	15/32	1 1/16	4 1/32	3 1/2	2 1/16	4 3/16	2 5/8	11/32	1 31/32	7/8	23/32	1 15/32	1.500					0.626
30 1 3/16 1 1/4	1 15/32	15/32	1 7/32	4 1/32	3 1/2	2 7/32	4 11/16	2 15/16	7/16	2 7/32	7/8	23/32	1 15/32	1.689	0.689	UCST206-18H1S6 UCST206H1S6 UCST206-19H1S6 UCST206-20H1S6	ST206H1	UC206-18S6 UC206S6 UC206-19S6 UC206-20S6	1.1	
	37	12	27	102	88.9	52	106	67	9	50	22	18	37	38.1	15.9					
	1 1/4	1 15/32	15/32	1 7/32	4 1/32	3 1/2	2 7/32	4 11/16	2 15/16	7/16	2 7/32	7/8	23/32	1 15/32	1.689					0.689
35 1 1/4 1 5/16 1 3/8 1 7/16	1 15/32	15/32	1 7/32	4 1/32	3 1/2	2 7/32	4 11/16	2 15/16	7/16	2 7/32	7/8	23/32	1 15/32	1.689	0.689	UCST207-20H1S6 UCST207-21H1S6 UCST207-22H1S6 UCST207H1S6 UCST207-23H1S6	ST207H1	UC207-20S6 UC207-21S6 UC207-22S6 UC207S6 UC207-23S6	1.5	
	37	12	31	102	88.9	56	119	75	11	56	22	18	37	42.9	17.5					
	1 7/16	1 15/32	15/32	1 7/32	4 1/32	3 1/2	2 7/32	4 11/16	2 15/16	7/16	2 7/32	7/8	23/32	1 15/32	1.689					0.689
40 1 1/2 1 9/16	1 15/16	5/8	1 1/4	4 1/2	4	2 29/32	5 5/16	3 11/32	9/16	2 17/32	1 5/32	25/32	1 15/16	1.937	0.748	UCST208-24H1S6 UCST208-25H1S6 UCST208H1S6	ST208H1	UC208-24S6 UC208-25S6 UC208S6	2.0	
	49	16	32	114	101.6	74	135	85	14	64	29	20	49	49.2	19					
	1 1/2	1 15/16	5/8	1 11/32	4 19/32	4	2 29/32	5 13/32	3 11/32	9/16	2 19/32	1 5/32	25/32	1 15/16	1.937					0.748
45 1 11/16 1 3/4	1 15/16	5/8	1 11/32	4 19/32	4	2 29/32	5 13/32	3 11/32	9/16	2 19/32	1 5/32	25/32	1 15/16	1.937	0.748	UCST209-26H1S6 UCST209-27H1S6 UCST209-28H1S6 UCST209H1S6	ST209H1	UC209-26S6 UC209-27S6 UC209-28S6 UC209S6	2.1	
	49	16	34	117	101.6	74	137	85	14	66	29	20	49	49.2	19					
	1 11/16	1 15/16	5/8	1 3/8	4 19/32	4	2 29/32	5 5/8	3 7/16	9/16	2 27/32	1 5/32	25/32	1 15/16	2.031					0.748
50 1 7/8 1 15/16 2	1 15/16	5/8	1 3/8	4 19/32	4	2 29/32	5 5/8	3 7/16	9/16	2 27/32	1 5/32	25/32	1 15/16	2.031	0.748	UCST210-30H1S6 UCST210-31H1S6 UCST210H1S6 UCST210-32H1S6	ST210H1	UC210-30S6 UC210-31S6 UC210S6 UC210-32S6	2.3	
	49	16	35	117	101.6	74	143	87	14	72	29	20	49	51.6	19					
	1 7/8	1 15/16	5/8	1 3/8	4 19/32	4	2 29/32	5 5/8	3 7/16	9/16	2 27/32	1 5/32	25/32	1 15/16	2.031					0.748

Part No. of the applicable grease fitting is B-1/4-28UNFN12.



Stainless steel series take-up type units



UCST-EH1S6

Cylindrical bore (with set screws)

d 20 ~ 50 mm



Shaft Dia. mm inch	Dimensions inch mm															Unit No.	Housing No.	Bearing No.	Mass kg	
	d	A	A ₁	A ₂	H	H ₁	H ₂	L	L ₁	L ₂	L ₃	N	N ₁	N ₂	B					S
20 3/4	1 1/4	17/32	29/32	3 1/2	3	1 13/16	3 1/2	2 5/16	11/32	1 23/32	3/4	23/32	1 1/4	1.220	0.500	UCST204-12EH1S6	ST204EH1	UC204-12S6 UC204S6	0.73	
	32	13.5	23	89	76.2	46	89	59	9	44	19	18	32	31	12.7	UCST204EH1S6				
25 7/8 15/16 1	1 1/4	17/32	31/32	3 1/2	3	1 13/16	3 21/32	2 3/8	11/32	1 23/32	3/4	23/32	1 1/4	1.343	0.563	UCST205-14EH1S6	ST205EH1	UC205-14S6 UC205-15S6 UC205S6 UC205-16S6	0.79	
	32	13.5	25	89	76.2	46	93	60	9	44	19	18	32	34.1	14.3	UCST205-15EH1S6				
																				UCST205EH1S6
																				UCST205-16EH1S6
30 1 1/8 1 3/16 1 1/4	1 15/32	17/32	1 1/16	4 1/32	3 1/2	2 1/16	4 3/16	2 5/8	11/32	1 31/32	7/8	23/32	1 15/32	1.500	0.626	UCST206-18EH1S6	ST206EH1	UC206-18S6 UC206S6 UC206-19S6 UC206-20S6	1.1	
	37	13.5	27	102	88.9	52	106	67	9	50	22	18	37	38.1	15.9	UCST206EH1S6				
																				UCST206-19EH1S6
35 1 1/4 1 5/16 1 3/8	1 15/32	17/32	1 7/32	4 1/32	3 1/2	2 7/32	4 11/16	2 5/16	7/16	2 7/32	7/8	23/32	1 15/32	1.689	0.689	UCST207-20EH1S6	ST207EH1	UC207-20S6 UC207-21S6 UC207-22S6 UC207S6	1.5	
	37	13.5	31	102	88.9	56	119	75	11	56	22	18	37	42.9	17.5	UCST207-21EH1S6				
																				UCST207-22EH1S6
																				UCST207EH1S6
40 1 1/2 1 9/16	1 15/16	11/16	1 1/4	4 1/2	4	2 29/32	5 5/16	3 11/32	9/16	2 17/32	1 5/32	25/32	1 15/16	1.937	0.748	UCST208-24EH1S6	ST208EH1	UC208-24S6 UC208-25S6 UC208S6	2.0	
	49	17.5	32	114	101.6	74	135	85	14	64	29	20	49	49.2	19	UCST208-25EH1S6				
																				UCST208EH1S6
45 1 5/8 1 11/16 1 3/4	1 15/16	11/16	1 11/32	4 19/32	4	2 29/32	5 13/32	3 11/32	9/16	2 19/32	1 5/32	25/32	1 15/16	1.937	0.748	UCST209-26EH1S6	ST209EH1	UC209-26S6 UC209-27S6 UC209-28S6 UC209S6	2.1	
	49	17.5	34	117	101.6	74	137	85	14	66	29	20	49	49.2	19	UCST209-27EH1S6				
																				UCST209-28EH1S6
																				UCST209EH1S6
50 1 7/8 1 15/16 2	1 15/16	11/16	1 3/8	4 19/32	4	2 29/32	5 5/8	3 7/16	9/16	2 27/32	1 5/32	25/32	1 15/16	2.031	0.748	UCST210-30EH1S6	ST210EH1	UC210-30S6 UC210-31S6 UC210S6 UC210-32S6	2.3	
	49	17.5	35	117	101.6	74	143	87	14	72	29	20	49	51.6	19	UCST210-31EH1S6				
																				UCST210EH1S6
																				UCST210-32EH1S6



Part No. of the applicable grease fitting is B-1/4-28UNFN12.

Plastic series pillow type units

UCVP-ES7

Cylindrical bore (with set screws)

d 20 ~ 50 mm

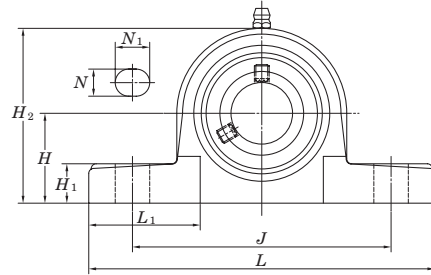

Shaft Dia.		Dimensions										Bolt Size	Unit No.	Housing No.	Bearing No.	Mass														
mm	inch	inch mm															inch	kg												
d		H	L	A	J	N	N_1	H_1	H_2	B	S	mm																		
20	3/4	1 5/16	5	1 1/2	3 3/4	7/16	9/16	9/16	2 19/32	1.220	0.500	3/8	UCVP204-12ES7	VP204E	UC204-12S7 UC204S7	0.29														
			33.3	127	38	95	11	14	14.2	65.5	31	12.7	M10																	
25	7/8	1 7/16	5 17/32	1 1/2	4 1/8	7/16	9/16	5/8	2 25/32	1.343	0.563	3/8	UCVP205-14ES7	VP205E	UC205-14S7 UC205-15S7 UC205S7 UC205-16S7	0.41														
	15/16																													
30	1 1/8	1 11/16	6 13/32	1 13/16	4 11/16	9/16	23/32	11/16	3 5/16	1.500	0.626	1/2	UCVP206-18ES7	VP206E	UC206-18S7 UC206S7 UC206-19S7 UC206-20S7	0.6														
	3/16																													
	1 1/4																													
35	1 1/4	1 7/8	6 5/8	1 7/8	5	9/16	23/32	23/32	3 23/32	1.689	0.689	1/2	UCVP207-20ES7	VP207E	UC207-20S7 UC207-21S7 UC207-22S7 UC207S7 UC207-23S7	0.84														
	5/16																													
	3/8																													
40	1 1/2	1 15/16	7 1/4	2 1/8	5 13/32	9/16	23/32	25/32	3 31/32	1.937	0.748	1/2	UCVP208-24ES7	VP208E	UC208-24S7 UC208-25S7 UC208S7	1.1														
	9/16																													
45	5/8	2 1/8	7 9/16	2 1/8	5 3/4	21/32	25/32	29/32	4 3/16	1.937	0.748	5/8	UCVP209-26ES7	VP209E	UC209-26S7 UC209-27S7 UC209-28S7 UC209S7	1.2														
	1 11/16																													
	3/4																													
50	7/8	2 1/4	8 1/8	2 3/8	6 1/4	21/32	25/32	29/32	4 1/2	2.031	0.748	5/8	UCVP210-30ES7	VP210E	UC210-30S7 UC210-31S7 UC210S7 UC210-32S7	1.4														
	1 15/16																													



Part No. of the applicable grease fitting is A-1/4-28UNFN12.

Plastic series pillow type units

UCVPAN-ES7

Cylindrical bore (with set screws)

d 20 ~ 35 mm



Shaft Dia mm inch		Dimensions inch mm									Unit No.	Housing No.	Bearing No.	Mass kg					
d		H	L	A	J	N	H_2	H_3	B	S									
20	$3/4$	$1\ 5/16$ 33.3	$2\ 7/8$ 73	$1\ 11/32$ 34.5	2 50.8	$3/8$ -16UNC	$2\ 19/32$ 66	$13/32$ 10.5	1.220 31	0.500 12.7	UCVPAN204-12ES7 UCVPAN204ES7	VPAN204E	UC204-12S7 UC204S7	0.26					
	25	$7/8$ $15/16$	$1\ 7/16$ 36.5	$2\ 25/32$ 71	$1\ 7/16$ 36.5	2 50.8	$3/8$ -16UNC	$2\ 25/32$ 71	$13/32$ 10.5	1.343 34.1					0.563 14.3	UCVPAN205-14ES7 UCVPAN205-15ES7 UCVPAN205ES7 UCVPAN205-16ES7	VPAN205E	UC205-14S7 UC205-15S7 UC205S7 UC205-16S7	0.36
1		30	$1\ 11/16$ 42.9	4 101.6	$1\ 11/16$ 42.5	3 76.2	$7/16$ -14UNC	$3\ 5/16$ 84	$15/32$ 12.1	1.500 38.1	0.626 15.9	UCVPAN206-18ES7 UCVPAN206ES7 UCVPAN206-19ES7 UCVPAN206-20ES7	VPAN206E	UC206-18S7 UC206S7 UC206-19S7 UC206-20S7	0.54				
$1\ 3/16$ $1\ 1/4$			35	$1\ 7/8$ 47.6	$4\ 11/32$ 110	$1\ 7/8$ 48	$3\ 1/4$ 82.6	$1/2$ -13UNC	$3\ 3/4$ 95	$17/32$ 13.7	1.689 42.9								
$1\ 5/16$ $1\ 3/8$	$1\ 1/4$ $1\ 5/16$ $1\ 3/8$ $1\ 7/16$																		



Part No. of the applicable grease fitting is A-1/4-28UNFN12.

Plastic series square four-bolt flange type units

UCVF-ES7

Cylindrical bore (with set screws)

d 20 ~ 40 mm

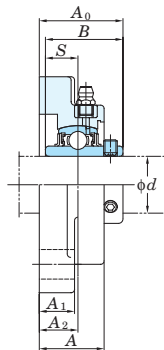

Shaft Dia. mm inch		Dimensions inch mm									Bolt Size inch mm	Unit No.	Housing No.	Bearing No.	Mass kg						
d		L	A	J	N	A_1	A_2	A_0	B	S											
20	$3/4$	$3\ 3/8$ 86	$1\ 3/32$ 27.8	$2\ 1/2$ 63.5	$7/16$ 11	$17/32$ 13.4	$45/64$ 18	$1\ 7/16$ 36.3	1.220 31	0.500 12.7	$3/8$ M8	UCVF204-12ES7 UCVF204ES7	VF204E	UC204-12S7 UC204S7	0.3						
	25	$7/8$ $15/16$	$3\ 3/4$ 95	$1\ 1/8$ 28.5	$2\ 3/4$ 70	$33/64$ 13	$5/8$ 15.5	$43/64$ 17	$1\ 7/16$ 36.8	1.343 34.1						0.563 14.3	$7/16$ M10	UCVF205-14ES7 UCVF205-15ES7 UCVF205ES7 UCVF205-16ES7	VF205E	UC205-14S7 UC205-15S7 UC205S7 UC205-16S7	0.41
1		30	$4\ 7/32$ 107	$1\ 1/4$ 31.7	$3\ 17/64$ 83	$33/64$ 13	$9/16$ 14.5	$3/4$ 19.2	$1\ 5/8$ 41.4	1.500 38.1	0.626 15.9	$7/16$ M10	UCVF206-18ES7 UCVF206ES7 UCVF206-19ES7 UCVF206-20ES7	VF206E	UC206-18S7 UC206S7 UC206-19S7 UC206-20S7	0.56					
$1\ 3/16$ $1\ 1/4$			35	$4\ 21/32$ 118	$1\ 11/32$ 34.5	$3\ 5/8$ 92	$35/64$ 14	$5/8$ 15.5	$27/32$ 21.5	$1\ 27/32$ 46.9	1.689 42.9										
$1\ 5/16$ $1\ 3/8$	40	$5\ 1/8$ 130		$1\ 7/16$ 36.5	$4\ 1/64$ 102	$35/64$ 14	$21/32$ 17	$29/32$ 23	$2\ 3/32$ 53.2	1.937 49.2	0.748 19	$1/2$ M12	UCVF208-24ES7 UCVF208-25ES7 UCVF208ES7	VF208E	UC208-24S7 UC208-25S7 UC208S7	1.08					
$1\ 1/2$ $1\ 9/16$																					



Part No. of the applicable grease fitting is A-1/4-28UNFN12.

Plastic series oval two-bolt flange type units

UCVFL-ES7

Cylindrical bore (with set screws)

d 20 ~ 40 mm



Shaft Dia.		Dimensions										Bolt Size	Unit No.	Housing No.	Bearing No.	Mass
mm	inch	inch mm														
d		H	L	A	J	N	A_1	A_2	A_0	B	S	mm				
20	3/4	4 7/16	2 9/16	1 1/32	3 35/64	7/16	17/32	19/32	1 5/16	1.220	0.500	3/8	UCVFL204-12ES7	VFL204E	UC204-12S7 UC204S7	0.25
		113	65	26.5	90	11	13.4	15	33.3	31	12.7	M8	UCVFL204ES7			
25	7/8	5 5/32	2 3/4	1 3/32	3 57/64	33/64	17/32	5/8	1 13/32	1.343	0.563	7/16	UCVFL205-14ES7	VFL205E	UC205-14S7 UC205-15S7 UC205S7	0.35
		131	70	27.5	99	13	13.8	16	35.8	34.1	14.3	M10	UCVFL205-15ES7 UCVFL205ES7 UCVFL205-16ES7			
30	1 1/8	5 13/16	3 5/32	1 3/16	4 39/64	33/64	9/16	45/64	1 19/32	1.500	0.626	7/16	UCVFL206-18ES7	VFL206E	UC206-18S7 UC206S7	0.49
		148	80	30.5	117	13	14.3	18	40.2	38.1	15.9	M10	UCVFL206ES7 UCVFL206-19ES7 UCVFL206-20ES7			
35	1 1/4	6 15/32	3 17/32	1 1/4	5 1/8	35/64	5/8	3/4	1 3/4	1.689	0.689	1/2	UCVFL207-20ES7	VFL207E	UC207-20S7 UC207-21S7 UC207-22S7 UC207S7	0.73
		164	90	32	130	14	15.5	19	44.4	42.9	17.5	M12	UCVFL207-21ES7 UCVFL207-22ES7 UCVFL207ES7 UCVFL207-23ES7			
40	1 1/2	6 15/16	3 15/16	1 11/32	5 43/64	35/64	21/32	53/64	2 1/32	1.937	0.748	1/2	UCVFL208-24ES7	VFL208E	UC208-24S7 UC208-25S7	0.92
		176	100	34.5	144	14	16.5	21	51.2	49.2	19	M12	UCVFL208-25ES7 UCVFL208ES7			



Part No. of the applicable grease fitting is A-1/4-28UNFN12.

Plastic series three-bolt flange type units

UCVFB-ES7

Cylindrical bore (with set screws)

d 20 ~ 35 mm



Shaft Dia.		Dimensions												Bolt Size	Unit No.	Housing No.	Bearing No.	Mass
mm	inch	inch mm																
d		H	L	A	J	J_1	N	H_1	A_1	A_2	A_0	B	S	mm				
20	3/4	4 1/4	2 1/2	1	1 1/2	7/8	27/64	1 11/16	7/16	39/64	1 5/16	1.220	0.500	3/8	UCVFB204-12ES7	VFB204E	UC204-12S7 UC204S7	0.25
		108	63.5	25.4	38.1	22.2	10.7	42.9	11.4	15.4	33.7	31	12.7	M10	UCVFB204ES7			
25	7/8	4 3/4	2 3/4	1 11/32	1 5/8	1 1/8	27/64	1 13/16	7/16	27/32	1 5/8	1.343	0.563	3/8	UCVFB205-14ES7	VFB205E	UC205-14S7 UC205-15S7 UC205S7	0.31
		121	70	34.1	41.3	28.6	10.7	46	11.4	21.5	41.3	34.1	14.3	M10	UCVFB205-15ES7 UCVFB205ES7 UCVFB205-16ES7			
30	1 1/8	5 15/32	3 1/4	1 1/4	1 7/8	1 1/4	27/64	2 1/16	17/32	49/64	1 5/8	1.500	0.626	3/8	UCVFB206-18ES7	VFB206E	UC206-18S7 UC206S7	0.47
		139	83	32	47.6	31.8	10.7	52.4	13.3	19.3	41.5	38.1	15.9	M10	UCVFB206ES7 UCVFB206-19ES7 UCVFB206-20ES7			
35	1 1/4	6 3/16	3 3/4	1 7/16	2	1 1/4	17/32	2 3/8	5/8	27/32	1 27/32	1.689	0.689	1/2	UCVFB207-20ES7	VFB207E	UC207-20S7 UC207-21S7 UC207-22S7 UC207S7	0.66
		157	95	36.6	50.8	31.8	13.1	60.3	16.1	21.7	47.1	42.9	17.5	M12	UCVFB207-21ES7 UCVFB207-22ES7 UCVFB207ES7 UCVFB207-23ES7			

Part No. of the applicable grease fitting is A-1/4-28UNFN12.

Ball bearing inserts

UC-S6 and S7

Cylindrical bore (with set screws)


d 12 ~ 60 mm



UC-S6



UC-S7



Shaft Dia. mm inch		Dimensions				Bearing No.		Dimensions				Set Screw Brig. Bore G	Mass
		inch mm						inch mm					
d		D	B	C	r (min.)	Stainless	Plated	C_1	S	S_1	S_2	mm	kg
12	1/2	1.575	1.079	0.512	0.024	UC201XS6	–	0.138	0.453	0.626	0.158	M5×0.5	0.10
		40	27.4	13	0.6	UC201-8XS6	–	3.5	11.5	15.9	4		
15	5/8	1.575	1.079	0.512	0.024	UC202XS6	–	0.138	0.453	0.626	0.158	M5×0.5	0.10
		40	27.4	13	0.6	UC202-10XS6	–	3.5	11.5	15.9	4		
17	–	1.575	1.079	0.512	0.024	UC203XS6	–	0.138	0.453	0.626	0.158	M5×0.5	0.10
		40	27.4	13	0.6			3.5	11.5	15.9	4		
20	3/4	1.850	1.220	0.630	0.039	UC204-12S6	UC204-12S7	0.157	0.500	0.720	0.197	M6×0.75	0.16
		47	31	16	1	UC204S6	UC204S7	4	12.7	18.3	5		
25	7/8	2.047	1.343	0.669	0.039	UC205-14S6	UC205-14S7	0.197	0.563	0.780	0.217	M6×0.75	0.23
						UC205-15S6	UC205-15S7						
	15/16	52	34.1	17	1	UC205S6	UC205S7	5	14.3	19.8	5.5		
						UC205-16S6	UC205-16S7						
30	1 1/8	2.441	1.500	0.748	0.039	UC206-18S6	UC206-18S7	0.197	0.626	0.874	0.236	M6×0.75	0.34
						UC206S6	UC206S7						
	1 3/16	62	38.1	19	1	UC206-19S6	UC206-19S7	5	15.9	22.2	6		
						UC206-20S6	UC206-20S7						
35	1 1/4	2.835	1.689	0.787	0.043	UC207-20S6	UC207-20S7	0.217	0.689	1.000	0.256	M8×1	0.54
						UC207-21S6	UC207-21S7						
	1 5/16	72	42.9	20	1.1	UC207-22S6	UC207-22S7	5.5	17.5	25.4	6.5		
						UC207S6	UC207S7						
40	1 7/16	3.150	1.937	0.827	0.043	UC207-23S6	UC207-23S7	0.236	0.748	1.189	0.315	M8×1	0.48
						UC208-24S6	UC208-24S7						
	1 1/2	80	49.2	21	1.1	UC208-25S6	UC208-25S7	6	19	30.2	8		
						UC208S6	UC208S7						
45	1 5/8	3.346	1.937	0.866	0.043	UC209-26S6	UC209-26S7	0.236	0.748	1.189	0.315	M8×1	0.68
						UC209-27S6	UC209-27S7						
	1 11/16	85	49.2	22	1.1	UC209-28S6	UC209-28S7	6	19	30.2	8		
						UC209S6	UC209S7						
50	1 7/8	3.543	2.031	0.945	0.043	UC210-30S6	UC210-30S7	0.236	0.748	1.283	0.354	M8×1	0.78
						UC210-31S6	UC210-31S7						
	1 15/16	90	51.6	24	1.1	UC210S6	UC210S7	6	19	32.6	9		
						UC210-32S6	UC210-32S7						
55	2	3.937	2.189	0.984	0.059	UC211-32S6	UC211-32S7	0.276	0.874	1.315	0.354	M10×1.25	1.26
						UC211-34S6	UC211-34S7						
	2 1/8	100	55.6	25	1.5	UC211S6	UC211S7	7	22.2	33.4	9		
						UC211-35S6	UC211-35S7						
60	2 3/16	4.331	2.563	1.063	0.059	UC212-36S6	UC212-36S7	0.295	1.000	1.563	0.413	M10×1.25	1.11
						UC212S6	UC212S7						
	2 1/4	110	65.1	27	1.5	UC212-38S6	UC212-38S7	7.5	25.4	39.7	10.5		
						UC212-39S6	UC212-39S7						



NIPPON PILLOW BLOCK CO., LTD.

HEAD OFFICE/Main Plant

2306 Hirao Miharaku Sakai Osaka 587-0022 JAPAN
TEL: 072-361-3752 FAX: 072-361-4173 E-mail: info@fyhbearings.com

SALES E-mail: exports@fyh.co.jp

FYH BEARING UNITS USA INC.

13201 FYH Drive Huntley, Illinois 60142, USA
TEL: 847-487-9111 FAX: 847-487-9222 E-mail: sales@fyhusa.com

fyhbearings.com

2011.07